



RMT 1210S



RMT 1230S



RMT (TPB)60



RMT 117



RMT 777



RMT 1240



RMT 177L



RMT (TPB)90



CP 0112



CP 0112 EXT



CP 1210 SVR




CP 1260



CP 1260 SVR



CP 1290

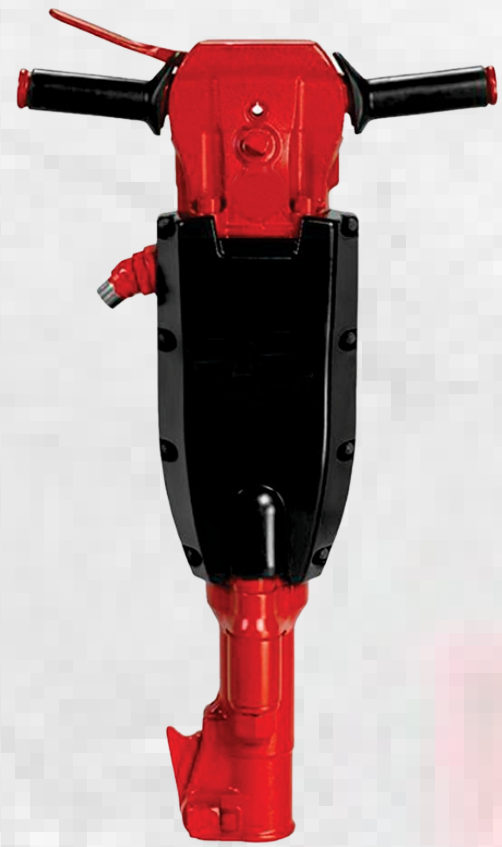

**CP 1290 SVR**



**TEX 140 PS**



**RTEX 15**



**TEX 150 PE**



**TEX 20 PS**




**TEX 21 PE**



**TEX 190 PE**



**RTEX 25**

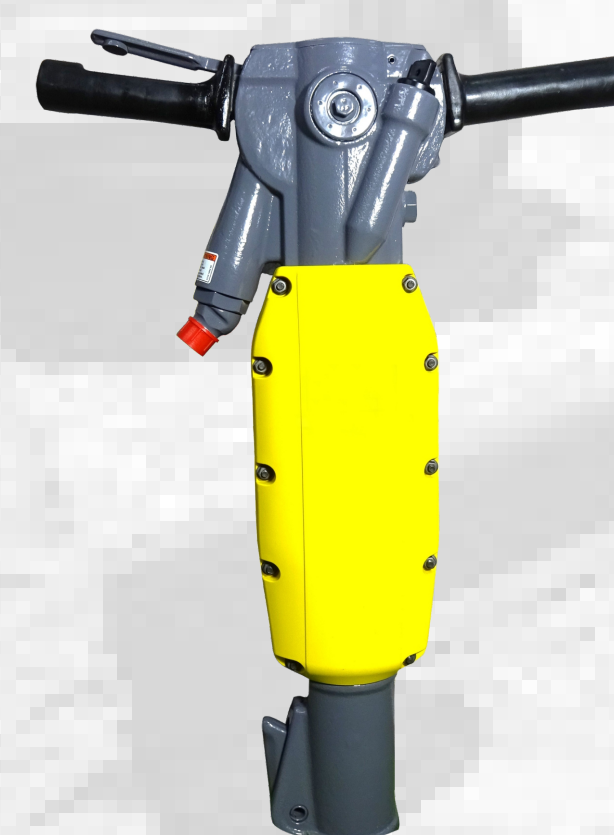

**TEX 230 PE**



**TEX 280 PE**



**RTEX 35**



**TEX P60S**



**TEX 33 PE**



**TEX 20 PS**



**TEX 39 PS**



**TEX P90S**



**TEX 40 PE**

RMT pneumatic breakers are available in weights, ranging from **35 lb to 90 lb class (20 kg to 41 kg)**. The hammers are available with different shank size, varying from **25 mm to 32 mm shank (1" to 1¼")**. These air tools are capable of light, medium and heavy duty jobs such as demolition, construction, renovation, road construction, bridge work and street repairs. Depending on the job in hand, users will find the most suitable breaker in **RMT range**. Being considered as the "manufacturer of high quality Paving Breakers from India", all our breakers are manufactured with the goal of providing "Operator's safety, maximum power, maximum durability, easily serviceable and affordable price"



Model #	TEX 20 PS	TEX 21 PE	TEX 190 PE	RTEX 25	TEX 230 PE	TEX 280 PE	RTEX 35	TEX P60S	TEX 33 PE
Weight with silencer (kg / lb)	20 kg / 44 lb	21 kg / 46 lb	23 kg / 51 lb	25 kg / 55 lb	25.5 kg / 56 lb	31.5 kg / 69 lb	33.2 kg / 73.2 lb	33 kg / 73 lb	37 kg / 82 lb
Weight without silencer (kg / lb)	-	-	-	-	-	-	-	31 kg / 68 lb	-
Length (mm / inch)	635 mm / 25"	650 mm / 25.6"	595 mm / 23.4"	780 mm / 31"	625 mm / 24.6"	690 mm / 27.2"	845 mm / 33.3"	690 mm / 27.2"	745 mm / 29.3"
Air pressure (bar / psi)	7 bar / 102 psi	-	-	7 bar / 102 psi	-	-	-	7 bar / 102 psi	-
Air consumption (ls / cfm)	25 l/s / 53 cfm	25 l/s / 52 cfm	26 l/s / 55 cfm	18.5 l/s / 39.2 cfm	30 l/s / 64 cfm	32 l/s / 64 cfm	21.5 l/s / 45.5 cfm	36 l/s / 76 cfm	34 l/s / 72 cfm
Blows per minute	1140	1140	1500	870	1320	1230	660	1500	1200
Piston dia (mm / inch)	-	-	-	-	-	-	-	-	-
Piston stroke (mm / inch)	-	-	-	-	-	-	-	-	-
Shank size (mm / inch) - Std	25 x 108 mm / 1" x 4¼"	25 x 108 mm / 1" x 4¼"	25 x 108 mm / 1" x 4¼"	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"
Shank size (mm / inch) Option- 1	-	-	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"
Shank size (mm / inch) Option- 2	-	-	-	-	25 x 108 mm / 1" x 4¼"	-	-	-	-
Retainer type	Latch	Latch	Latch	Lock retainer	Latch	Latch	Notch latch	Latch	Latch

Model #	TEX 37	TEX 39 PS	TEX P90S	TEX 40 PE
Weight with silencer (kg / lb)	37 kg / 81 lb	39 kg / 86 lb	43 kg / 95 lb	42 kg / 93 lb
Weight without silencer (kg / lb)	-	-	41 kg / 90 lb	-
Length (mm / inch)	729 mm / 29"	750 mm / 29.5"	710 mm / 28"	750 mm / 29.5"
Air pressure (bar / psi)	7 bar / 102 psi	-	7 bar / 102 psi	-
Air consumption (ls / cfm)	35 l/s / 74 cfm	40 l/s / 85 cfm	40 l/s / 85 cfm	40 l/s / 85 cfm
Blows per minute	1200	1110	1260	1110
Piston dia (mm / inch)	-	-	-	-
Piston stroke (mm / inch)	-	-	-	-
Shank size (mm / inch) - Std	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"	32 x 160 mm / 1¼" x 6¼"
Shank size (mm / inch) Option- 1	-	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"	28 x 160 mm / 1½" x 6¼"
Shank size (mm / inch) Option- 2	-	-	-	-
Retainer type	Latch	Latch	Latch	Latch